




UNI 5737 | EN ISO 4014* | DIN 931

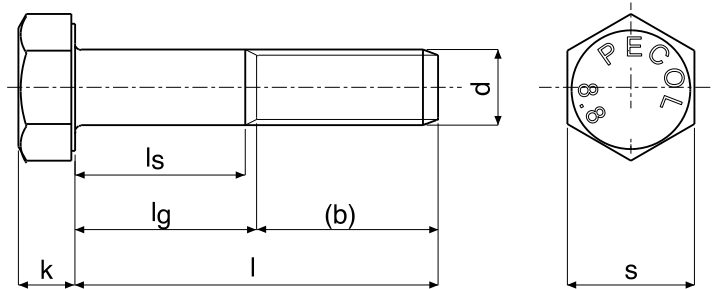

Aço 6.8; 8.8; 10.9; Inox A2; A4;
Steel 6.8; 8.8; 10.9; Stainless Steel A2; A4;
Acero 6.8; 8.8; 10.9; Acero Inoxidable A2; A4;
Acier 6.8; 8.8; 10.9; Acier Inoxydable A2; A4;
Acciaio 6.8; 8.8; 10.9; Acciaio Inossidabile A2; A4;

Na versão EN ISO 4014 o diâmetro: 10, 12, 14, 22 varia unicamente na dimensão s | *In the version EN ISO 4014 diameters: 10,12,14, 22 differ only for the dimension s* | *En la versión EN ISO 4014 en los diámetros 10,12, 14 y 22 sólo se diferencian de las dimensiones s* | *Dans la version EN ISO 4014 les diamètres : 10, 12, 14, 22 varient uniquement selon la valeur s* | *Nella versione EN ISO 4014 i diametri: 10,12,14, 22 variano unicamente per il valore s*

Parafuso cabeça sextavada rosca métrica parcial

Hexagon bolt metric coarse pitch thread | Tornillos de cabeza hexagonal, parcialmente roscados | Vis à tête hexagonale pas large, filetage métrique partiel | Viti a testa esagonale con gambo parzialmente filettato

D	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30	M36	M42
P (1)	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5	4	4.5
sDIN-UNI	7	8	10	13	17	19	22	24	27	30	32	32	41	46	55	65
s* EN ISO	-	-	-	-	16	18	21	-	-	-	34	-	-	-	-	-
K	2.8	3.5	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15	17	18.7	22.5	26
b ≤ 125	14	16	18	22	26	26	34	38	42	46	50	54	60	66	78	90
125 < b ≤ 200	-	22	24	28	32	32	40	44	48	52	56	60	66	72	84	96
b > 200	-	-	-	-	45	49	53	57	61	65	69	73	79	85	97	109
ls min.	ls min. = lg max. - 5 x p															
lg. max	Lg max. = L - b															
l (mm)	peso/ weight/ peso/ poids/ peso - 1000pc/Kg															
25	3.12	4.86														
30	3.61	5.64	8.06													
35	4.04	6.42	9.13	18.2												
40	4.53	7.20	10.2	20.3	35.0											
45	50.3	7.98	11.3	22.2	38.0	53.6										
50	5.52	9.76	12.3	24.2	41.1	58.1	79.4									
55	6.02	9.54	13.4	25.8	43.8	62.6	85.30	115								
60	6.51	10.3	14.4	27.8	46.9	67.0	91.20	123								
65	7.01	11.1	15.15	29.8	50.0	70.3	97.20	131	171	219						
70	7.50	12.7	16.5	31.8	53.1	74.7	103.1	139	181	231	281					
75		13.5	17.6	33.7	56.2	79.1	109	147	191	243	296					
80			18.6	35.7	59.3	83.6	115	155	200	255	311	392				
90			20.8	39.6	65.5	92.4	126.7	171	220	279	341	428	557	712		
100				43.6	71.7	101	139	186	240	303	370	464	603	767		
110				47.5	83.9	109	151	202	260	327	400	500	650	823		
120					90.0	118	162	218	280	351	430	535	695	880	1320	
130					96.2	127	170	230	296	374	450	560	720	920	1390	1980
140					102	136	182	246	316	398	480	595	765	975	1470	2090
150					108	145	194	262	336	422	510	630	810	1030	1550	2200
160						153	205	278	356	446	540	665	855	1085	1630	2310
180						171	229	310	396	494	600	735	945	1200	1790	2520
200						180	253	342	435	544	660	805	1030	1310	1950	2740
220							276	374	474	594	720	870	1130	1420	2110	
240								406	513	644		935	1220	1530	1170	
260								438	552	694			1310	1640	2430	
280														1750	2590	
300														1860	2750	

Outras medidas sob consulta | Other measures upon request | Otras medidas solo bajo encargo | Autres mesures sur demande | Altre misure a richiesta

P (1) passo de rosca | thread pitch | paso de rosca | pas filetage | passo del filetto

Vários acabamentos. Peça-nos mais informações. | Surface treatment. Please ask us for more information. | Acabamientos variados. Pídenos más información. | Plusieurs finitions. Contactez-nous pour plus d'information. | Ricopertura di superficie. A richiesta.



peças, pieces, piezas, pièces, pezzi