


UNI 5923 | EN ISO 4026 | DIN 913

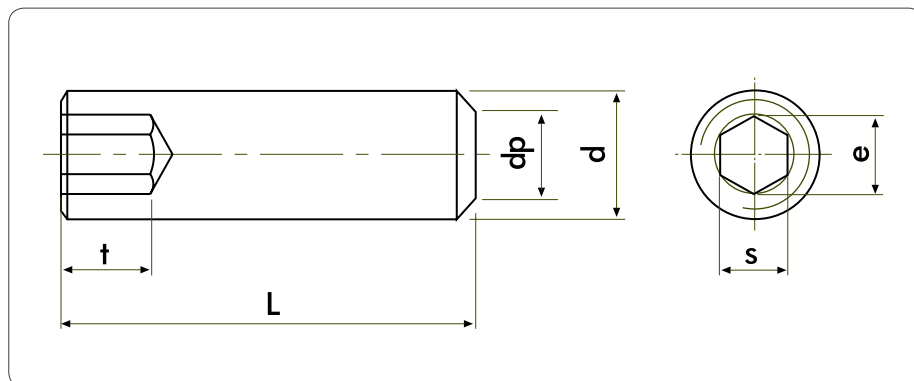

Perno de rosca métrica com ponta plana e sextavado interior

Hexagon socket set screw with flat point | Tornillo sin cabeza con hueco hexagonal y extremo biselado | Vis sans tête à six pans creux bout plat | Viti senza testa con cava esagonale punta piana

| D | M3 | M4 | M5 | M6 | M8 | M10 | M12 | M14 | M16 | M18 | M20 | M22 | M24 |
|--------|---|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|
| P (1) | 0.50 | 0.70 | 0.80 | 1.00 | 1.25 | 1.50 | 1.75 | 2.00 | 2.00 | 2.50 | 2.50 | 2.50 | 3.00 |
| e | 1.73 | 2.30 | 2.87 | 3.44 | 4.00 | 5.00 | 6.00 | 6.00 | 8.00 | 10.00 | 10.00 | 12.00 | 12.00 |
| s | 1.50 | 2.00 | 2.50 | 3.00 | 4.58 | 5.72 | 6.86 | 6.86 | 9.15 | 11.43 | 11.43 | 13.72 | 13.72 |
| t | 1.20 | 1.50 | 2.00 | 2.00 | 3.00 | 4.00 | 4.80 | 5.60 | 6.40 | 7.20 | 8.00 | 9.00 | 10.00 |
| dp max | 2.00 | 2.50 | 3.50 | 4.00 | 5.50 | 7.00 | 8.50 | 10.00 | 12.00 | 13.00 | 15.00 | 17.00 | 18.00 |
| dp min | 1.75 | 2.25 | 3.20 | 3.70 | 5.20 | 6.64 | 8.14 | 9.64 | 11.57 | 12.57 | 14.57 | 16.57 | 17.57 |
| L (mm) | peso/ weight/ peso/ poids/ peso - 1000pc/Kg | | | | | | | | | | | | |
| 3 | 0.10 | | | | | | | | | | | | |
| 4 | 0.14 | 0.22 | | | | | | | | | | | |
| 5 | 0.18 | 0.30 | 0.44 | 0.65 | | | | | | | | | |
| 6 | 0.22 | 0.38 | 0.56 | 0.76 | 1.26 | | | | | | | | |
| 8 | 0.31 | 0.53 | 0.80 | 1.11 | 1.89 | | | | | | | | |
| 10 | 0.40 | 0.68 | 1.04 | 1.46 | 5.52 | 3.78 | 6.15 | | | | | | |
| 12 | 0.49 | 0.83 | 1.28 | 1.81 | 3.15 | 4.78 | 7.6 | | | | | | |
| 16 | 0.67 | 1.13 | 1.76 | 2.51 | 4.41 | 6.78 | 9.6 | 13 | 15.5 | | | | |
| 18 | 0.70 | 1.28 | 2.00 | 2.76 | 5.05 | 7.63 | 10.4 | 15 | 18.1 | | | | |
| 20 | 0.85 | 1.43 | 2.24 | 3.21 | 5.67 | 8.76 | 12.4 | 17 | 21.5 | 27.0 | 32.3 | | |
| 25 | | 1.81 | 2.84 | 4.09 | 7.26 | 11.2 | 16.0 | 22 | 28.0 | 35.2 | 42.6 | 45.0 | 57.0 |
| 30 | | 2.19 | 3.44 | 4.97 | 8.85 | 13.7 | 19.6 | 27 | 34.6 | 43.4 | 52.9 | 57.5 | 72.0 |
| 35 | | | 4.04 | 5.85 | 10.4 | 16.2 | 23.2 | 32 | 41.1 | 51.5 | 63.2 | 70.0 | 87.0 |
| 40 | | | 4.64 | 6.73 | 12.0 | 18.7 | 26.8 | 37 | 47.7 | 59.6 | 73.6 | 83.0 | 102 |
| 45 | | | | 7.60 | 13.6 | 21.1 | 29.7 | 42 | 53.2 | 67.8 | 83.8 | 96.0 | 117 |
| 50 | | | | 8.50 | 15.2 | 23.6 | 33.3 | 47 | 59.7 | 75.9 | 94.1 | 109 | 132 |
| 60 | | | | | | 26.1 | 40.5 | 57 | 72.7 | 92.0 | 115 | 134 | 162 |
| 70 | | | | | | | | 67 | 85.7 | 108 | 136 | 160 | 192 |

Outras medidas sob consulta | Other measures upon request | Otras medidas solo bajo encargo | Autres mesures sur demande | Altre misure a richiesta
P (1) passo de rosca | thread pitch | paso de rosca | pas filetage | passo del filetto

Vários acabamentos. Peça-nos mais informações. | Surface treatment. Please ask us for more information. | Acabamientos variados. Pídenos más información. | Plusieurs finitions. Contactez-nous pour plus d'informations. | Ricopertura di superficie. A richiesta.

