


# DIN 608



Ferro; Aço 8.8;  
Iron; Steel 8.8;  
Hierro; Acero 8.8;  
Fer; Acier 8.8;  
Ferro; Acciaio 6.8; 8.8;

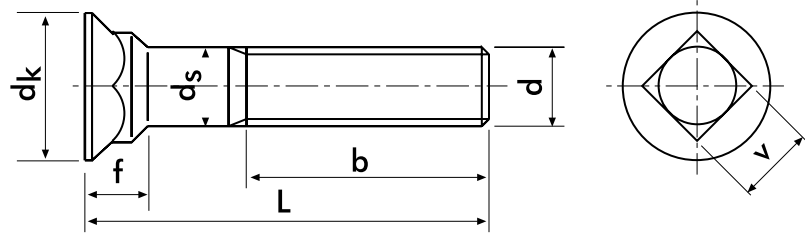

## Parafuso arreigada quadrada cabeça embeber

Flat countersunk square neck bolt | Tornillo de cabeza avellanada y cuello cuadrado bajo | Vis à tête fraisée empreinte et collet carré | Viti testa svasata con quadro

D	M10	M12	M16
P (1)	1.5	1.75	2
b	26	30	-
dk max.	19.65	24.65	-
ds max.	10	12	16
f max.	8.45	11.05	-
v max.	10.58	12.7	-
L (mm)	peso/ weight/ peso/ poids/ peso - 1000pc/Kg		
25	18.2	33.0	
30	20.7	36.6	78.0
35	23.2	40.2	84.0
40	28.8	43.8	91.0
45	31.9	48.2	97.0
50	32.5	51.0	104
55	35.0	55.0	110
60	38.0	59.0	117
65	40.5	63.0	123
70	43.0	67.0	130
75	46.0	71.0	136
80	51.0	79.0	149

Outras medidas sob consulta | Other measures upon request | Otras medidas solo bajo encargo | Autres mesures sur demande | Altre misure a richiesta

P (1) passo de rosca | thread pitch | paso de rosca | pas filetage | passo del filetto

Vários acabamentos. Peça-nos mais informações. | Surface treatment. Please ask us for more information. | Acabamientos variados. Pídenos más información. | Plusieurs finitions. Contactez-nous pour plus d'informations. | Ricopertura di superficie. A richiesta.



1

5

10

15

20

25

50

100

150

200

250

400

500

1000

peças, pieces, piezas, pièces, pezzi